
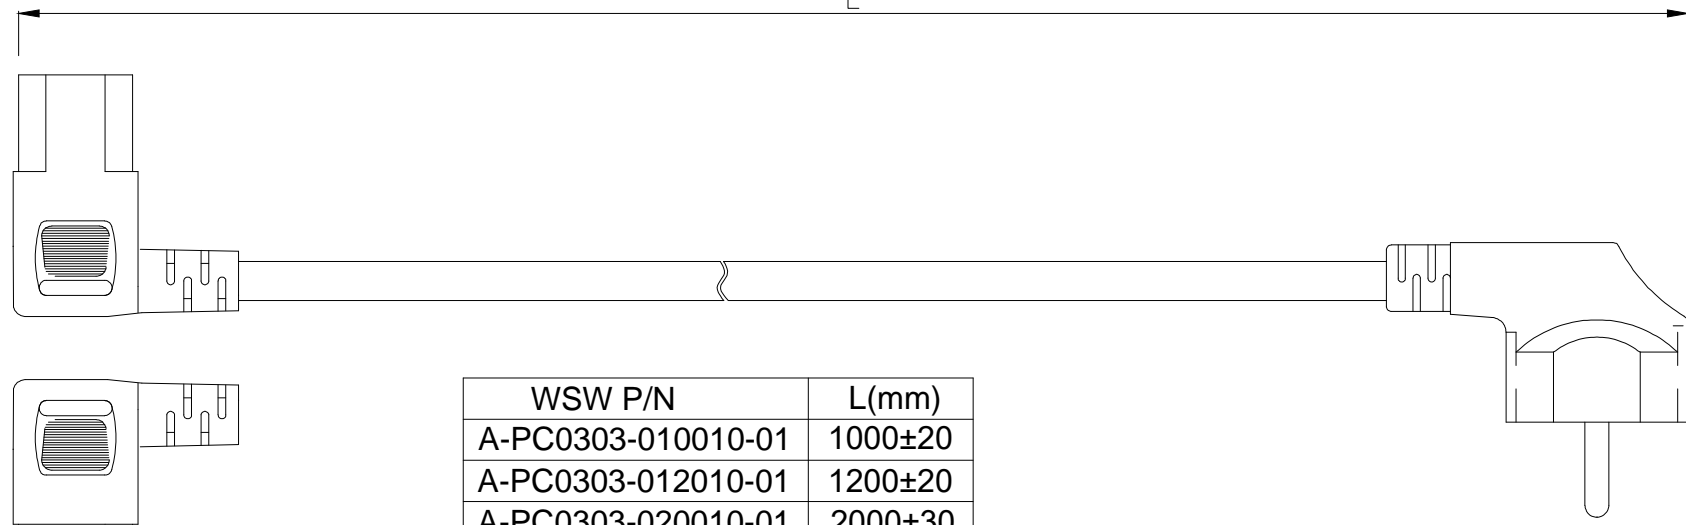


1 2 3 4 5 6 7

A

A




B

B

C


C



WSW P/N	L(mm)
A-PC0303-010010-01	1000±20
A-PC0303-012010-01	1200±20
A-PC0303-020010-01	2000±30
A-PC0303-030010-01	3000±40
A-PC0303-035010-01	3500±50
A-PC0303-050010-01	5000±75
A-PC0303-100010-01	10000±200


D

D

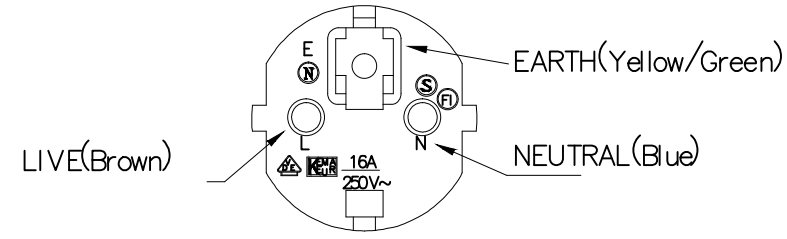

E

E

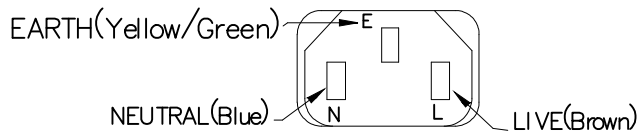

IEC 60320-1 C13

IEC 60884-1 CEE7-VII

**NOTES:**  
 Cable Type:  
 1.H05VV-F 3Cx1.00mm<sup>2</sup>.  
 2.Jacket Color: Black.  
  
 Electrical Test:  
 1.100% Open & Short Testing.

G

G

RoHS compliant  
Unit: mm

Scale	Free				Date	Name	Description: Power Cord	
TOLERANCE					Drawn	23.07.2024	Luca	ASSMANN WSW-No. <b>A-PC0303-0xxx10-01</b>
					Approved	23.07.2024	Luca	
DIM	TOL							Drawing-No. <b>ASS 11055 CA</b> rev00
		©	Drawn	23.07.2024				
Angle	TOL	Id.	Modification	Date	Name	A company of		Customer-No. Sheet

H

H

1 2 3 4 5 6 7