

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C



D

E

F

G

H

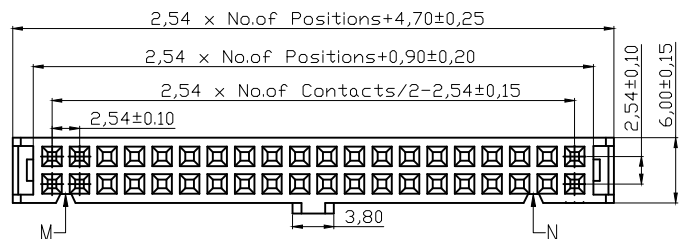

NOTES:







MATERIAL

- 1. Insulator Material: PBT+30%G.F (UL94V-0) Black
 - 2. Contact Plating : Selective Gold Flash / Ni
- ELECTRICAL**
- 1. Current Rating : 3.0AMP
 - 2. Voltage Rating : 1000V AC/rms, 60HZ
 - 3. Dielectric Voltage : 1000V AC/rms, 60HZ for 1 minute
 - 4. Contact Resistance : 20mΩ max at 1A DC
 - Operation Temperature: -40 C to +105 C

- 6P-8P Without Slot "M" and "N"
- 10P-12P With Slot "M" , Without Slot "N"
- 14P-64P With Slot "M" and "N"

- AWP XX-7241-LC With SR
- AWP XX-7240-LC Without SR

- ④ 6P Without Slot "M" and "N"
- 8P-12P With Slot "M" , Without Slot "N"
- 14P-64P With Slot "M" and "N"

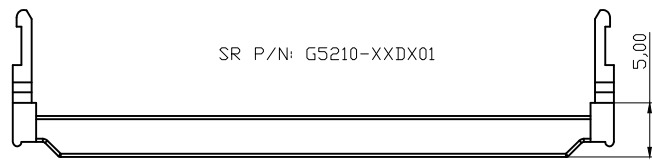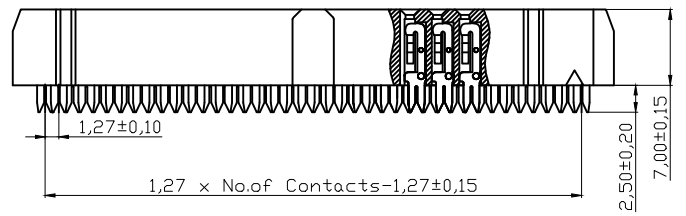

RoHS compliant

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	21.02.2002	Hellwig
X.	±0.40					Approved	28.06.2010	Hellwig
X.X	±0.25							ASSMANN WSW-No. AWP xx-7241-LC AWP xx-7240-LC
X.XX	±0.15	④	Update drawing	28.10.2015	Jesse			
X.°	3°	②	Update	28.06.2010	Alex	ASSMANN WSW/ components		Drawing-No.
X.X°	1°							ASS 1249 CO
X.XX°	X°	①	Drawn	21.02.2002	Hellwig	Replace		Sheet
X.XXX°	X°	Id.	Modification	Date	Name			

1

2

3

4

5

6

7