
Product Change Notification(PCN)

Issue Date: 17.12.2012
Modification / Revision Date: 21.12.2012

Power outlet, with snap-in, 6.3mm Fast-on Tabs

Change Notification # : PCN 20121217-A-KGB-S

Description of changes:

1. Amendment of the specification
2. Dimension overall height : New : 28.0 mm
3. Dimension length : New : 19.5mm
4. Dimension Panelcut-out : New : 25.5 x 32.5 mm R4.0max
5. Dimension Face width : New : 35.5 mm
6. Dimension backside width : New : 32.5 mm
7. Material Insulator : New : Nylon66
8. Catalogue 2010 shows different specification
9. Draw.-No. ASS 0889E C0rev04 substitutes ASS 0889E C0rev03

Date of change and Implementation Change: December 2012 / Implementation: December 2012






Key Characteristics of Change: some tiny dimensions

Products Affected: A-KGB-S

Reason for Change: Change of manufacturing location

Response : No response to this notification is required.

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

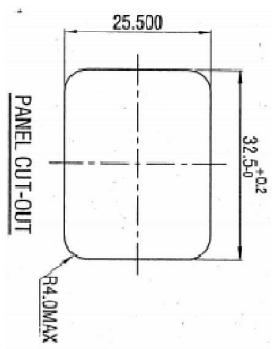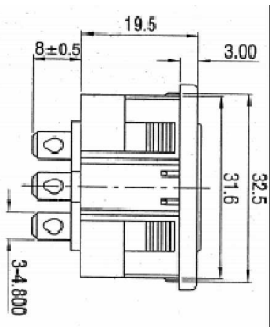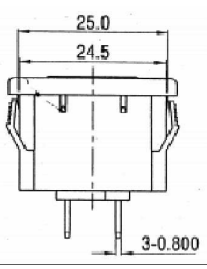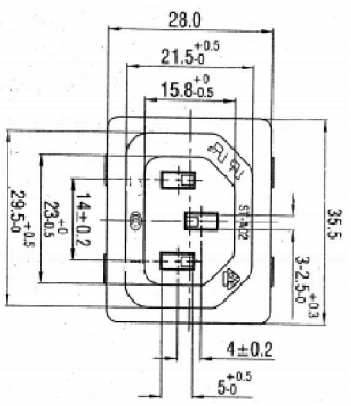

RoHS compliant

Scale	1:1								
TOLERANCE									
X.X	±0.3								
X.XX	±0.2	④	Change of the part			Drawn	14.12.2007	N.Schulz	
X.XXX	±0.1	③	Update			Approved	17.12.2012	Winke	
DIM	TOL	②	Update						
Ang.	±3°	①	Drawn						
UNIT	mm	hd.	Modification						

Customer-No.		ASSMANN WSM-AG	A-KGB-S
Drawing-No.		ASS 0889E CO	rev04
Replace			SHEET

- NOTES:**
- A. Material:
 1. Housing: PA66 UL 94V-0
 2. Terminal: COPPER ALLOY, TIN PLATED
 - B. Electrical Characteristics:
 1. Rating: 15A, 250V~ (UL CUL)
 - 10A, 250V~ (CCC VDE)
 2. Electric Strength: AG 2,000 V FOR ONE MINUTE
 3. Insulation Resistance: 100MΩ MIN. AT 500V/DC
 - C. Approvals:
 - UL, CUL, CCC, VDE