



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 04.07.2024
MODIFICATION / REVISION DATE: 04.07.2024

A-WBH-M002EG-xxCB01 Wire To Board Housing Pitch 2.54mm

CHANGE NOTIFICATION: [PCN_20240704_AWBHM002EGxxCB01](#)

DESCRIPTION OF CHANGES: [CHANGE OF PRODUCT DESIGN](#)
[CHANGE OF EQUIPMENT AND/OR TOOLS](#)
[New Draw.-ASS_8963_COrev03](#)

REASON FOR CHANGE: [CHANGE OF PRODUCT DIMENSIONS, TOLERANCES AND/OR PROPERTIES](#)

KEY CHARACTERISTICS OF CHANGE: [Details see page 3](#)

PRODUCTS AFFECTED: [A-WBH-M002EG-xxCB01](#)

DATE OF CHANGE AND IMPLEMENTATION: [CHANGE: 27/2024](#)
[IMPLEMENTATION: 04.07.2024](#)

RESPONSE: [NO RESPONSE TO THIS NOTIFICATION IS REQUIRED](#)

PCN REVISION HISTORY:

DATE OF REVISION: 04.07.2024

REVISION NUMBER: 00

page 1/

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 04.07.2024
MODIFICATION / REVISION DATE: 04.07.2024


REFERENCE DOCUMENTS / ATTACHMENTS:
DOCUMENT: DRAWING

| ASSMANN WSW P/N | Drawing Number | | ASSMANN WSW P/N | Drawing Number |
|---------------------|------------------|---|---------------------|------------------|
| A-WBH-M002EG-xxCB01 | ASS_8963_COrev02 | ↔ | A-WBH-M002EG-xxCB01 | ASS_8963_COrev03 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Auf dem Schöffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 04.07.2024
MODIFICATION / REVISION DATE: 04.07.2024

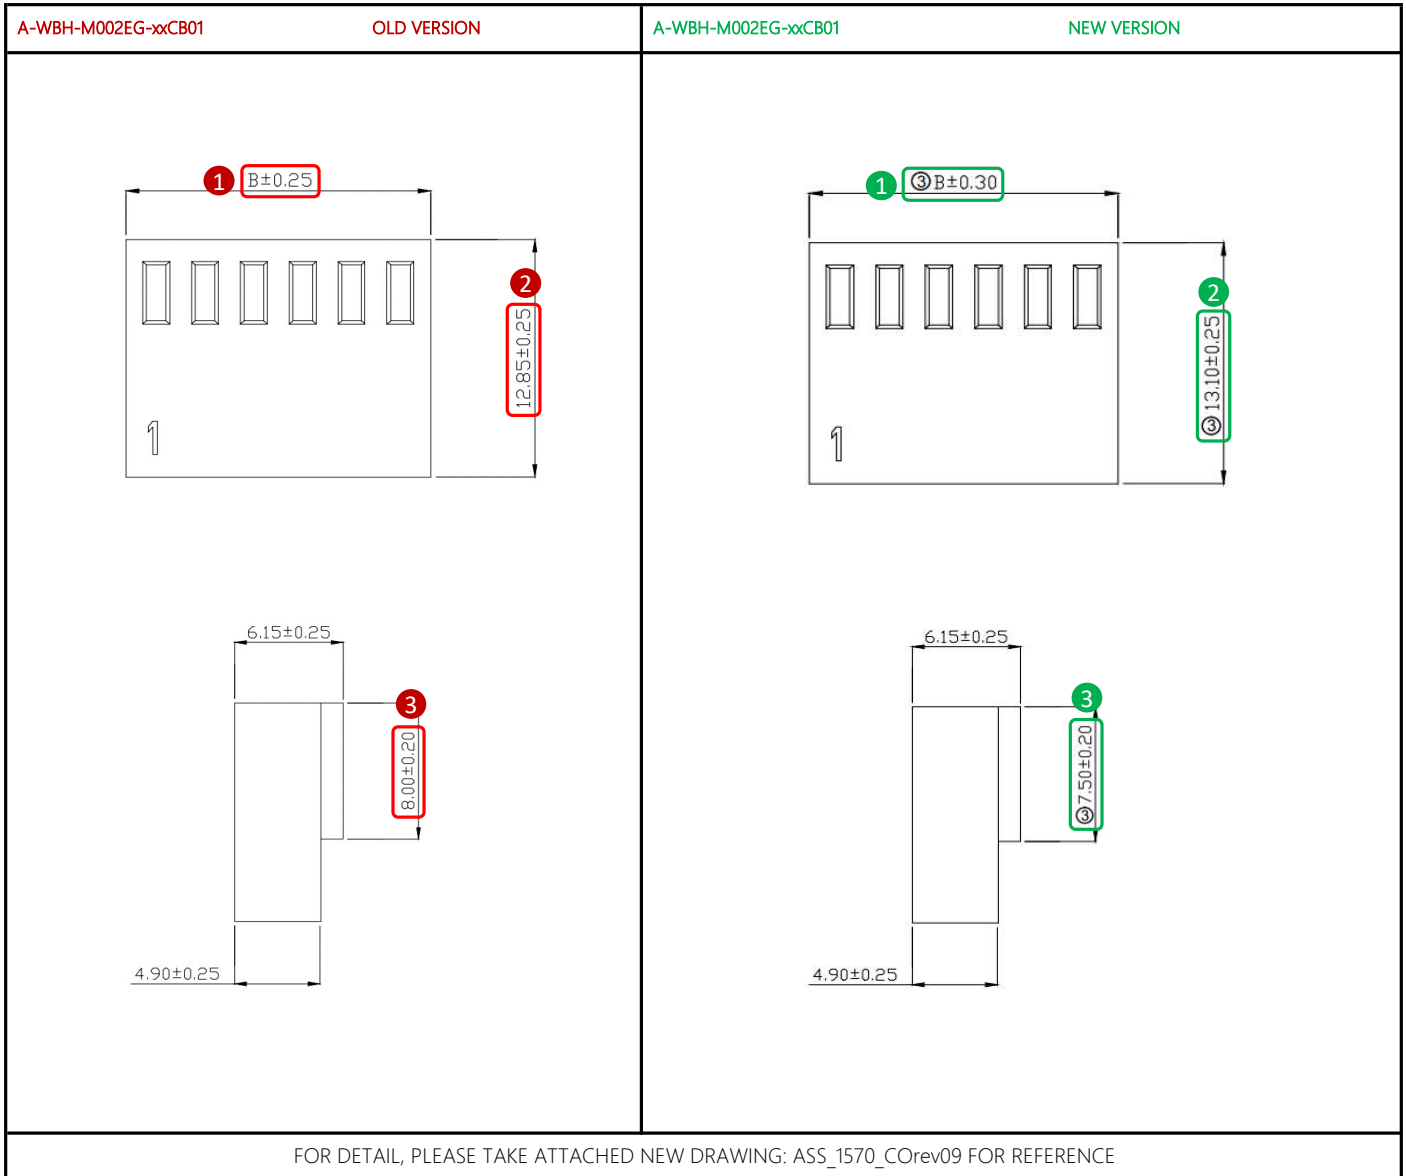

PCN REVISION HISTORY:
DATE OF REVISION: 04.07.2024

REVISION NUMBER: 00

1

2

3


4

5

6

7

A





B

C

D

E

F

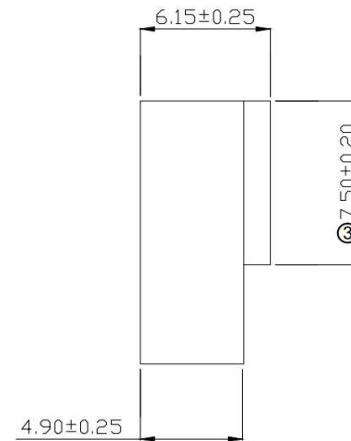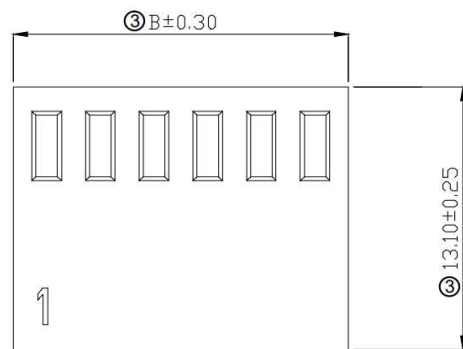**Notes:**

Material:

Insulator Material: PA66, UL94V-0, Beige

Electrical:

Voltage rating: 250V AC/DC

Current rating: 4A AC/DC

Insulation resistance: 1000MΩ Min

Withstanding Voltage: 1000VAC/minute

Mechanical:

Operating Temperature: -40°C to +105°C

Packing: PE bag

A

B

C

D

E

F

| Poles | Dimensions(mm) | | Poles | Dimensions(mm) | | Poles | Dimensions(mm) | |
|-------|----------------|-------|-------|----------------|-------|-------|----------------|-------|
| | A | B | | A | B | | A | B |
| 02 | 2.54 | 5.68 | 09 | 20.32 | 23.46 | 16 | 38.10 | 41.24 |
| 03 | 5.08 | 8.22 | 10 | 22.86 | 26.00 | | | |
| 04 | 7.62 | 10.76 | 11 | 25.40 | 28.54 | | | |
| 05 | 10.16 | 13.00 | 12 | 27.94 | 31.08 | | | |
| 06 | 12.70 | 15.84 | 13 | 30.48 | 33.62 | | | |
| 07 | 15.24 | 18.38 | 14 | 33.02 | 36.16 | | | |
| 08 | 17.78 | 20.92 | 15 | 35.56 | 38.70 | | | |

G

RoHS compliant

Unit: mm

Scale Free

TOLERANCE

X. ±0.35

X.X ±0.25

X.XX ±0.20

X.XXX ±0.15

DIM TOL

Angle TOL

③ Update the dimension of housing

28.06.2024

Peter

Approved

28.06.2024

Peter

② Remove the EOL part

23.02.2024

Peter

① Add UL E-No. on page 1,2

16.03.2023

Peter

④ Drawn

18.06.2021

Winnie

Id.

Modification

Date

Name

Date

Name

Description: Wire to Board housing / 180°

ASSMANN WSW-No.
A-WBH-M002EG-xxCB01

Drawing-No.

ASS 8963 CO

rev03

Customer-No.

Sheet

3/4

G

H

1

2

3

4

5

6

7

ASSMANN
WSW/ components
A company of BCS